D E C L A R A T I O N

I, Hiroshi Kurokawa, residing at 7 th Fl., Shuwa Kioicho Park Bldg., 3-6, Kioicho, Chiyoda-ku, Tokyo, Japan, hereby declare that I have a thorough knowledge of Japanese and English languages, and that the attached pages contains a correct translation into English of the application document of Japanese Patent Application No. 2002-266873 filed on September 12, 2002 in the name of CANON KABUSHIKI KAISHA.

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statement were made with the knowledge that willful false statements and the like so made, are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signed this 10th day of March, 2005

H. Kurokawa
Hiroshi Kurokawa

Translation of Japanese Patent Application No. 2002-266873

[Type of Document(s)]	Application for patent
[Reference Number]	4786003
[Filing Date]	September 12, 2002
[Addressee]	Director-General of the Patent Office, Esq.
[International Patent Classification]	G02B 7/28
[Title of Invention]	AUTOFOCUS APPARATUS AND METHOD, AND IMAGE SENSING APPARATUS
[Number of Claim(s)]	16

[Inventor(s)]
 [Address/Domicile] c/o CANON KABUSHIKI KAISHA 3-30-2, Shimomaruko, Ohta-ku, Tokyo, Japan
 [Name] Shinya Hirai

[Applicant for Patent]
 [Identification Number] 000001007
 [Name] CANON KABUSHIKI KAISHA
 [Address/Domicile] 3-30-2, Shimomaruko, Ohta-ku, Tokyo, Japan
 [Representative] Fujio Mitarai

[Agent]
 [Identification Number] 100066061
 [Address/Domicile] 3rd Fl., NIHONSEIMEI SHINBASHI BLDG., 1-18-16, SHINBASHI, MINATO-KU, TOKYO
 [Patent Attorney]
 [Name] Hiroyuki Niwa
 [Telephone] 03-3503-2821

[Selected Agent]
 [Identification Number] 100094754
 [Address/Domicile] 3rd Fl., NIHONSEIMEI SHINBASHI BLDG., 1-18-16, SHINBASHI, MINATO-KU, TOKYO
 [Patent Attorney]
 [Name] Tadao Noguchi
 [Telephone] 03-3503-2821

[Detail of Fee(s)]

    [Register Number of

      Prepayment]   011707

    [Amount of Payment]   21000

[List of Attached Documents]

    [Classification]   Specification   1

    [Classification]   Drawing(s)   1

    [Classification]   Abstract   1

[Number of General Power of

Attorney]   9703800

[Proof Required? Y/N]   Yes

[Type of the Document] Specification

[Title of the Invention] AUTOFOCUS APPARATUS AND METHOD, AND IMAGE SENSING APPARATUS

[What is Claimed Is:]

5   [Claim 1] An autofocus apparatus comprising:

a first distance measurement means which measures a distance of overall region of a distance measurement region of a direction to an object;

a second distance measurement means which

10   measures a distance only near an in-focus position in previous photographing;

a memory means which stores an in-focus position and a photographing condition in a distance measurement; and

15   a first control means which selects said second distance measurement means when previous and current photographing conditions satisfy a predetermined requirement in photographing, and selects said first distance measurement means when the previous and

20   current photographing conditions do not satisfy the predetermined requirement.

[Claim 2] An autofocus apparatus comprising:

a second distance measurement means which measures a distance only near an in-focus position in

25   previous photographing;

a third distance measurement means which divides overall region of a distance measurement region of a

direction to an object and measures a distance until each divided region become in-focus;

a memory means which stores an in-focus position and a photographing condition in a distance

5   measurement; and

a second control means which selects said second distance measurement means when previous and current photographing conditions satisfy a predetermined requirement in photographing, and selects said third

10   distance measurement means when the previous and current photographing conditions do not satisfy the predetermined requirement.

[Claim 3]   The apparatus according to claim 2, wherein said second control means so controls as to

15   select said second distance measurement means only when the in-focus position in previous photographing exists in a divided region to be measured later by said third distance measurement means.

[Claim 4]   The apparatus according to claim 2,

20   wherein said second control means so controls as to measure a third divided region including the in-focus position in previous photographing when said second distance measurement means is selected.

[Claim 5]   The apparatus according to anyone of

25   claims 1 to 4, wherein the predetermined requirement is satisfied when at least one condition capable of specifying that the previous and current photographing

2

conditions are substantially the same exists.

[Claim 6]   The apparatus according to claim 5, wherein the specifiable condition includes conditions that

5   ① a zoom position is substantially the same between previous photographing and current photographing

② hardly any time difference exists

③ a photographing mode has not been changed

④ an AF frame setting is the same

10   ⑤ brightness is substantially the same

⑥ an AF evaluation value is substantially the same

⑦ white balance is substantially the same

⑧ a portrait/landscape photographing position is the same

15   ⑨ the object can be focused in previous photographing.

[Claim 7]   An autofocus method comprising:

a step A of determining whether previous and current photographing conditions satisfy a predetermined requirement in photographing;

20   a step B of, when the previous and current photographing conditions are determined in the step A to satisfy the predetermined requirement, measuring a distance only near an in-focus position in previous photographing;

25   a step C of, when the previous and current photographing conditions are determined in the step A not to satisfy the predetermined requirement, measuring

3

a distance of overall region of a predetermined

distance measurement region of a direction to an

object; and

5   a step D of, when an in-focus position is

detected in the step B or the step C, photographing at

the in-focus position.

[Claim 8]   An autofocus method comprising:

a step A of determining whether previous and

current photographing conditions satisfy a

10   predetermined requirement in photographing;

a step B of, when the previous and current

photographing conditions are determined in the step A

to satisfy the predetermined requirement, measuring a

distance only near an in-focus position in previous

15   photographing;

a step E of, when the previous and current

photographing conditions are determined in the step A

not to satisfy the predetermined requirement, dividing

overall region of a predetermined distance measurement

20   region of a direction to an object into a plurality of

regions and measuring a distance until each divided

region become in-focus; and

a step F of, when an in-focus position is

detected in the step B or the step E, photographing at

25   the in-focus position.

[Claim 9]   An image sensing apparatus comprising

an autofocus apparatus defined in anyone of claims 1 to

6.

[Claim 10] An image sensing apparatus
comprising:

an optical system having a focus lens; and

5   a control means which determines whether previous
and current image sensing conditions coincide with each
other, on the basis of a parameter in previous image
sensing operation that is stored in a memory in advance
and a parameter in current image sensing operation,

10   when the previous and current image sensing
conditions are determined not to coincide with each
other, scans the focus lens in a predetermined range,
thereby acquiring an evaluation value representing a
focusing degree, and

15   when the previous and current image sensing
conditions are determined to coincide with each other,
scans the focus lens in a range which includes an
in-focus position of the focus lens in previous image
sensing operation that is stored in the memory in

20 advance and is narrower than the predetermined range,
thereby acquiring an evaluation value representing a
focusing degree.

[Claim 11] The apparatus according to claim 10,
wherein the predetermined range includes an entire

25 range scannable by the focus lens.

[Claim 12] The apparatus according to claim 10,
wherein the predetermined range includes a range

5

obtained by dividing a range scannable by the focus

lens into a plurality of zones, and when the in-focus

position of the focus lens is not determined, said

control device scans the focus lens in a new zone.

5   [Claim 13] The apparatus according to claim 10,

wherein the parameter in image sensing operation

includes at least one of information on a zoom lens

position, photographing time, a photographing mode,

information on an AF frame setting, information on an

10   object brightness, information on an AF evaluation

value, information on a white balance control value,

information on a portrait/landscape position of the

image sensing apparatus, and information on whether the

focus lens has been focused in previous image sensing

15   operation.

[Claim 14] An autofocus method comprising:

determining whether previous and current image

sensing conditions coincide with each other, on the

basis of a parameter in previous image sensing

20   operation that is stored in a memory in advance and a

parameter in current image sensing operation;

when the previous and current image sensing

conditions are determined not to coincide with each

other, scanning a focus lens in a predetermined range,

25   thereby acquiring an evaluation value representing a

focusing degree; and

when the previous and current image sensing

conditions are determined to coincide with each other, scanning the focus lens in a range which includes an in-focus position of the focus lens in previous image sensing operation that is stored in the memory in

5 advance and is narrower than the predetermined range, thereby acquiring an evaluation value representing a focusing degree.

[Claim 15] A program causing a computer to execute an autofocus method defined in claim 14.

10 [Claim 16] A storage medium computer-readably storing a program defined in claim 15.

[Detailed Description of the Invention]

[0001]

[Technical Field to Which the Invention Belongs]

15 The present invention relates to an autofocus apparatus, autofocus method, and image sensing apparatus and, more particularly, to shortening of a time taken for autofocus.

[0002]

20 [Prior Art]

Digital cameras and the like often adopt an autofocus (to be referred to as AF hereinafter) method (see Japanese Patent Laid-Open No. 2000-152064) called a TV-AF method. In this method, an object distance is

25 calculated from the values of AF evaluation signals at points by moving the focus position within a given range. The AF evaluation signal is calculated using a

BPF (Band Pass Filter) so as to increase as the lens is focused much more.

[0003]

For example, for a distance measurement range of infinity to 50 cm, an AF evaluation signal at a focus position where the lens is focused to infinity is acquired, as shown in Fig. 6. While the focus position is sequentially moved close up to 50 cm, an AF evaluation signal at each distance is acquired. AF evaluation signals various distances are compared, and the focus position is moved to distance A where the lens is determined to be focused best, thereby controlling the focus. The abscissa in Fig. 6 represents the object distance at which the focus lens is in focus.

[0004]

In general, it is difficult to successively acquire AF evaluation signals while changing the focus position. In many cases, AF evaluation signals are acquired by sampling at, e.g., a distance interval corresponding to the depth of field.

[0005]

[Patent Reference 1]

Japanese Patent Laid-Open No. 2000-152064

[0006]

[Problems That the Invention Is to Solve]

In, however, a camera having an optical system

whose depth of field is shallow or a camera having a
wide distance measurement range in the distance
direction, even if AF evaluation signals are acquired
by sampling in the above-described way, the total

5 number of acquired data is large, resulting in a long
distance measurement time.

[0007]

The present invention has been made in
consideration of the above situation, and has as its

10 object to provide an autofocus apparatus and method,
and an image sensing apparatus capable of shortening
the AF time without decreasing the AF precision even
when the total number of acquired AF evaluation signals
is large.

15 [0008]

[Means of Solving the Problems]

To achieve the above object, in the present
invention, an autofocus apparatus is configured as (1)
to (7), an autofocus method is configured as (7) and

20 (8), and an image sensing apparatus is configured as
(9).

[0009]

(1)   An autofocus apparatus comprising:

a first distance measurement means which measures

25 a distance of overall region of a distance measurement
region of a direction to an object;

a second distance measurement means which

9

measures a distance only near an in-focus position in previous photographing;

a memory means which stores an in-focus position and a photographing condition in a distance

5   measurement; and

a first control means which selects said second distance measurement means when previous and current photographing conditions satisfy a predetermined requirement in photographing, and selects said first

10   distance measurement means when the previous and current photographing conditions do not satisfy the predetermined requirement.

[0010]

(2)   An autofocus apparatus comprising:

15   a second distance measurement means which measures a distance only near an in-focus position in previous photographing;

a third distance measurement means which divides overall region of a distance measurement region of a

20   direction to an object and measures a distance until each divided region become in-focus;

a memory means which stores an in-focus position and a photographing condition in a distance measurement; and

25   a second control means which selects said second distance measurement means when previous and current photographing conditions satisfy a predetermined

requirement in photographing, and selects said third distance measurement means when the previous and current photographing conditions do not satisfy the predetermined requirement.

5 [0011]

(3)　The autofocus apparatus according to (2), wherein when the third distance measurement means is selected, the second control means controls so that a distance measurement is started from a latter divided region in

10 the case that in-focus position in previous photographing exists in a divided region in which a distance measurement is performed later.

[0012]

(4)　The autofocus apparatus according to (2), wherein

15 when the third distance measurement means is selected, the second control means controls so that a distance measurement is started from a divided region in which in-focus position in previous photographing exists.

[0013]

20 (5)　The autofocus apparatus according to anyone of (1) to (4), wherein the predetermined requirement is satisfied when at least one condition capable of specifying that the previous and current photographing conditions are substantially the same exists.

25 [0014]

(6)　The autofocus apparatus according to (5) wherein the specifiable condition includes conditions that

11

① a zoom position is substantially the same between

   previous photographing and current photographing

② hardly any time difference exists

③ a photographing mode has not been changed

④ an AF frame setting is the same

⑤ brightness is substantially the same

⑥ an AF evaluation value is substantially the same

⑦ white balance is substantially the same

⑧ a portrait/landscape photographing position is the

   same.

[0015]

(7)   An autofocus method comprising:

        a step A of determining whether previous and

current photographing conditions satisfy a

predetermined requirement in photographing;

        a step B of, when the previous and current

photographing conditions are determined in the step A

to satisfy the predetermined requirement, measuring a

distance only near an in-focus position in previous

photographing;

        a step C of, when the previous and current

photographing conditions are determined in the step A

not to satisfy the predetermined requirement, measuring

a distance of overall region of a predetermined

distance measurement region of a direction to an

object; and

        a step D of, when an in-focus position is

12

detected in the step B or the step C, photographing at the in-focus position.

[0016]

(8)   An autofocus method comprising:

5   a step A of determining whether previous and current photographing conditions satisfy a predetermined requirement in photographing;

         a step B of, when the previous and current photographing conditions are determined in the step A

10   to satisfy the predetermined requirement, measuring a distance only near an in-focus position in previous photographing;

         a step E of, when the previous and current photographing conditions are determined in the step A

15   not to satisfy the predetermined requirement, dividing overall region of a predetermined distance measurement region of a direction to an object into a plurality of regions and measuring a distance until each divided region become in-focus; and

20   a step F of, when an in-focus position is detected in the step B or the step E, photographing at the in-focus position.

[0017]

(9)   An image sensing apparatus comprising an

25   autofocus apparatus defined in (1) to (6).

[0018]

(10) An image sensing apparatus comprising:

13

an optical system having a focus lens; and

a control means which determines whether previous and current image sensing conditions coincide with each other, on the basis of a parameter in previous image

5   sensing operation that is stored in a memory in advance and a parameter in current image sensing operation,

when the previous and current image sensing conditions are determined not to coincide with each other, scans the focus lens in a predetermined range,

10   thereby acquiring an evaluation value representing a focusing degree, and

when the previous and current image sensing conditions are determined to coincide with each other, scans the focus lens in a range which includes an

15   in-focus position of the focus lens in previous image sensing operation that is stored in the memory in advance and is narrower than the predetermined range, thereby acquiring an evaluation value representing a focusing degree.

20   [0019]

[Embodiments]

Preferred embodiments of the present invention will be described in more detail by exemplifying a digital camera. The present invention is not limited

25   to the form of an apparatus, and can be practiced by the form of a method on the basis of the description of the following embodiments.

14

[0020]

(First Embodiment)

Fig. 1 is a block diagram showing the schematic arrangement of a "digital camera" serving as an image sensing apparatus having an autofocus apparatus according to the first embodiment.

[0021]

In the digital camera, light which is imaged by an optical system 01 having a zoom lens and a focus lens 02 is photoelectrically converted by an image sensing element 03. The resultant signal is digitized via a preprocessing circuit 04 having a CDS circuit for removing output noise and a nonlinear amplifier circuit before A/D conversion, and an A/D converter 05. The digital signal is stored in a memory 07 via a memory controller 06. The signal is converted into an image by a signal processing circuit (not shown), and then the image is recorded on a recording medium 08.

[0022]

AF operation will be explained. AF operation is controlled by a control unit 11. When a SW1 09 is pressed, a focus lens driving circuit 17 drives the focus lens 02 so as to scan a range selected by a photographing condition analysis unit 12 and range setting unit 13. At the same time, the focus lens driving circuit 17 acquires an image signal output from the image sensing element 03. An image signal acquired

at each driving position of the focus lens 02 is
converted into an AF evaluation value representing the
degree of focusing by extracting intermediate- and
high-frequency signal components by an AF evaluation
5   value calculation circuit 14 using a BPF. An in-focus
position determination unit 15 determines as an
in-focus position a position (A in Fig. 5) where the
largest AF evaluation value is obtained. The control
unit 11 causes the focus lens driving circuit 17 to
10   drive the focus lens 02 to the in-focus position. A
picture is taken when the user presses a SW2 10 upon
the completion of driving the focus lens 02. The
in-focus position and photographing conditions in
photographing are stored in a photographing condition
15   memory unit 16.

[0023]

AF operation will be explained in more detail
with reference to the flow chart of Fig. 2.

[0024]

20   In step 1 (S1 in Fig. 2; this also applies to the
following steps), photographing conditions are
analyzed. If the focus lens 02 is scanned for the
first time, the processing advances to step 2, and the
focus lens 02 is so set as to scan a predetermined
25   range where the scanning range is relatively wide
(e.g., the entire range scannable by the focus lens 02)
in order to obtain AF evaluation values in a wide

2002-266873

range. If the focus lens 02 is scanned for the second
time or more upon power-on of the digital camera,
whether the previous and current photographing
conditions are almost the same is determined. If so,
5 the scanning range of the focus lens 02 is set in step
2 so as to be smaller than the predetermined range and
contain an in-focus position in previous photographing;
otherwise, the focus lens 02 is set in step 2 so as to
scan the predetermined range.

10 [0025]

In a comparison between previous and current
photographing parameters, photographing is determined
to be executed under almost the same conditions when,
for example, all the following conditions are satisfied
15 (corresponding to "when a predetermined requirement is
satisfied" in the appended claims).

[0026]

The position of the zoom lens in photographing is
the same or almost the same between previous
20 photographing and current photographing.

Hardly any time difference exists between the
previous photographing time and the current
photographing time.

The setting of a macro mode in which a close-up
25 object is sensed or a non-macro mode in which a normal
object is sensed has not been changed.

The AF frame number serving as the region of

17

2002-266873

image signals detected to obtain AF evaluation values has not been changed.

The brightness in photographing is almost the same.

5   The AF evaluation value is almost the same.

[0027]

A condition "focusable in previous photographing" may also be added. The AF evaluation value is calculated as follows using a known method. A BPF may

10   be applied to photographing signals, and a maximum amplitude value within the AF frame may be set as an evaluation value out of signals from which intermediate- and high-frequency signal components are extracted. Alternatively, a maximum value may be

15   extracted along a predetermined direction in which the BPF extracts values within the AF frame, and a value calculated by integrating the maximum value in a direction perpendicular to the BPF direction may be set as an AF evaluation value. The method of calculating

20   the AF evaluation value is not the point of the present invention, and a description thereof will be omitted.

[0028]

As a comparison method, for example, pieces of photographing information may be stored as previous

25   information and current information in the memory unit 16, as shown in Fig. 3, and determination may be done as follows.

Photographing is regarded to be executed under
similar photographing conditions if the following
conditions are satisfied:

[previous photographing zoom position]

5   = [current photographing zoom position]

and [current photographing time] - [previous
photographing time] < (10 sec)

and [previous macro setting] = [current macro setting]

and [previous AF frame setting] = [current AF frame

10   setting]

and | [current brightness] - [previous brightness] |
< 1 (Ev)

and | [current AF evaluation value] - [previous AF
evaluation value] | < 300

15 [0029]

As "almost the same conditions", the difference
in white balance result may be used. For a camera
capable of determining a portrait or landscape
position, whether the photographing position has been

20 changed may be used for determination. For a camera
capable of moving the AF frame, whether the frame
position has been moved may be used for determination.
Another condition capable of specifying whether
photographing conditions are almost the same may be

25 used.

[0030]

In step 3, the focus lens 02 is driven within the

scanning range determined in step 2, thus obtaining an AF evaluation signal.

In step 4, an in-focus position is determined. As for determination of the in-focus position, values between AF evaluation values obtained in step 3 are calculated by interpolation calculation based on AF evaluation values obtained by scanning, and a point where the AF evaluation value maximizes is determined as an in-focus position.

[0031]

In step 5, the current photographing conditions and the in-focus position obtained in step 4 are stored.

[0032]

In step 6, an image signal is obtained from the image sensing element 03 in order to record the image signal on the recording medium 08. At the same time, the focus lens is driven to the in-focus position.

In this manner, AF operation is completed.

[0033]

By the above-described processing, the focus lens 02 need not scan the entire scanning range for almost the same scene. An AF evaluation signal is obtained by scanning the focus lens 02 in a neighboring range where an object exists. Focusing operation can be quickly completed without decreasing the precision.

[0034]

In the first embodiment, all the conditions described above must be satisfied. Alternatively, one or more conditions suffice to be satisfied.

[0035]

As described above, the first embodiment can shorten the AF time without decreasing the AF precision even when the total number of acquired AF evaluation signals is large.

[0036]

(Second Embodiment)

In a "digital camera" according to the second embodiment, the scanning range of the focus lens 02 in the first embodiment is divided in advance, and the divided ranges are sequentially scanned (to be referred to as divisional scanning hereinafter) to obtain AF evaluation values. The remaining part is the same, and a description thereof will be omitted.

[0037]

Divisional scanning will be explained. In the second embodiment, the scanning range of the focus lens is divided as shown in Fig. 4. In Fig. 4, the abscissa represents the position to which the focus lens is driven, and for illustrative convenience, represents an object distance corresponding to a position where the focus lens is in focus.

A method of scanning a divided region will be explained with reference to the flow chart of Fig. 5.

21

In step 11, a zone n representing a divided range to be scanned first is determined. In the second embodiment, n = 1, and zones are scanned sequentially from a range (zone 1) where the focus lens is focused

5   on a far object to a zone where the focus lens is focused on a near object.

[0038]

In step 12, the nth region of the zone where the focus lens is in focus closer by one from the

10   previously scanned zone is scanned in the divided range.

In step 13, the focusing state is determined in each zone, and if the focus lens can be in focus, the processing ends. If the focus lens cannot be in focus,

15   the region is updated in step 14, and the processing returns to step 12.

[0039]

More specifically, the second embodiment adopts divisional scanning if previous and current

20   photographing conditions are determined not to be almost the same in step 1 of Fig. 2 in the first embodiment. Note that the zone is a range wider than a range set when previous and current photographing conditions are determined to be almost the same.

25   [0040]

In the first embodiment, whether previous and current photographing conditions are almost the same is

22

determined, and if no, the entire range of the scanning

region is scanned in step 2. In the second embodiment,

a predetermined distance measurement region is divided

into three, the divided regions are sequentially

5   scanned, and scanning ends in a focusable zone. The

second embodiment can shorten the AF time much more

than the first embodiment.

[0041]

In divisional scanning, the focus lens can be

10   quickly focused when an object exists in a range to be

scanned first. However, a long time is taken to focus

the focus lens when an object exists in a range to be

scanned later. From this, the distance may be measured

near the previous in-focus position only when the

15   in-focus position in previous photographing falls

within a zone to be scanned later. A zone including

the previous in-focus position may be scanned.

[0042]

In the second embodiment, the entire scanning

20   range is scanned in the first scanning. Alternatively,

divisional scanning may be executed.

[0043]

The present invention also includes a case wherein

software program codes for realizing the functions of

25   the above-described embodiments are supplied to the

computer of an apparatus or system connected to various

devices so as to operate the devices in order to realize

23

the functions of the above-described embodiments, and
the devices are operated in accordance with the program
stored in the computer (or the CPU or MPU) of the system
or apparatus.

5 [0044]

In this case, the software program codes realize
the functions of the above-described embodiments, and
the program codes constitute the present invention. A
device for supplying the program codes to the computer,

10 such as a storage medium which stores the program codes,
constitutes the present invention. The storage medium
which stores the program codes includes a flexible disk,
hard disk, optical disk, magnetooptical disk, CD-ROM,
magnetic tape, nonvolatile memory card, and ROM.

15 [0045]

The functions of the above-described embodiments
are realized when the computer executes the supplied
program codes. Also, when the functions of the
above-described embodiments are realized by the program

20 codes in cooperation with an OS (Operating System),
another application software, or the like running on the
computer, the program codes are included in the
embodiments of the present invention.

[0046]

25 Further, the present invention includes a case
wherein, after the supplied program codes are stored in
the memory of the function expansion board of the

computer or the memory of a function expansion unit

connected to the computer, the CPU of the function

expansion board or function expansion unit performs

part or all of actual processing on the basis of the

5   instructions of the program codes and thereby realizes

the functions of the above-described embodiments.

[0047]

[Effect of the Invention]

As has been described above, the present

10   invention can shorten the AF time without decreasing

the AF precision even when the total number of acquired

AF evaluation signals is large.

[Brief Description of the Drawings]

[Fig. 1]

15   Fig. 1 is a block diagram showing an arrangement

according to the first embodiment.

[Fig. 2]

Fig. 2 is a flow chart showing processing in AF

operation.

20   [Fig. 3]

Fig. 3 is a table showing a memory example of a

memory unit 16.

[Fig. 4]

Fig. 4 is a view showing an example of division

25   of the scanning range of a focus lens according to the

second embodiment.

[Fig. 5]

Fig. 5 is a flow chart showing processing in AF operation according to the second embodiment.

[Fig. 6]

Fig. 6 is a graph showing an example of the

5 relation between the object distance corresponding to the in-focus position and the AF evaluation value.

[Description of the Reference Numerals]

11   control unit

12   photographing condition analysis unit

10 13   range setting unit

14   AF evaluation value calculation circuit

15   in-focus position determination unit

16   photographing condition memory unit

17   focus lens driving circuit

15

FIG. 1

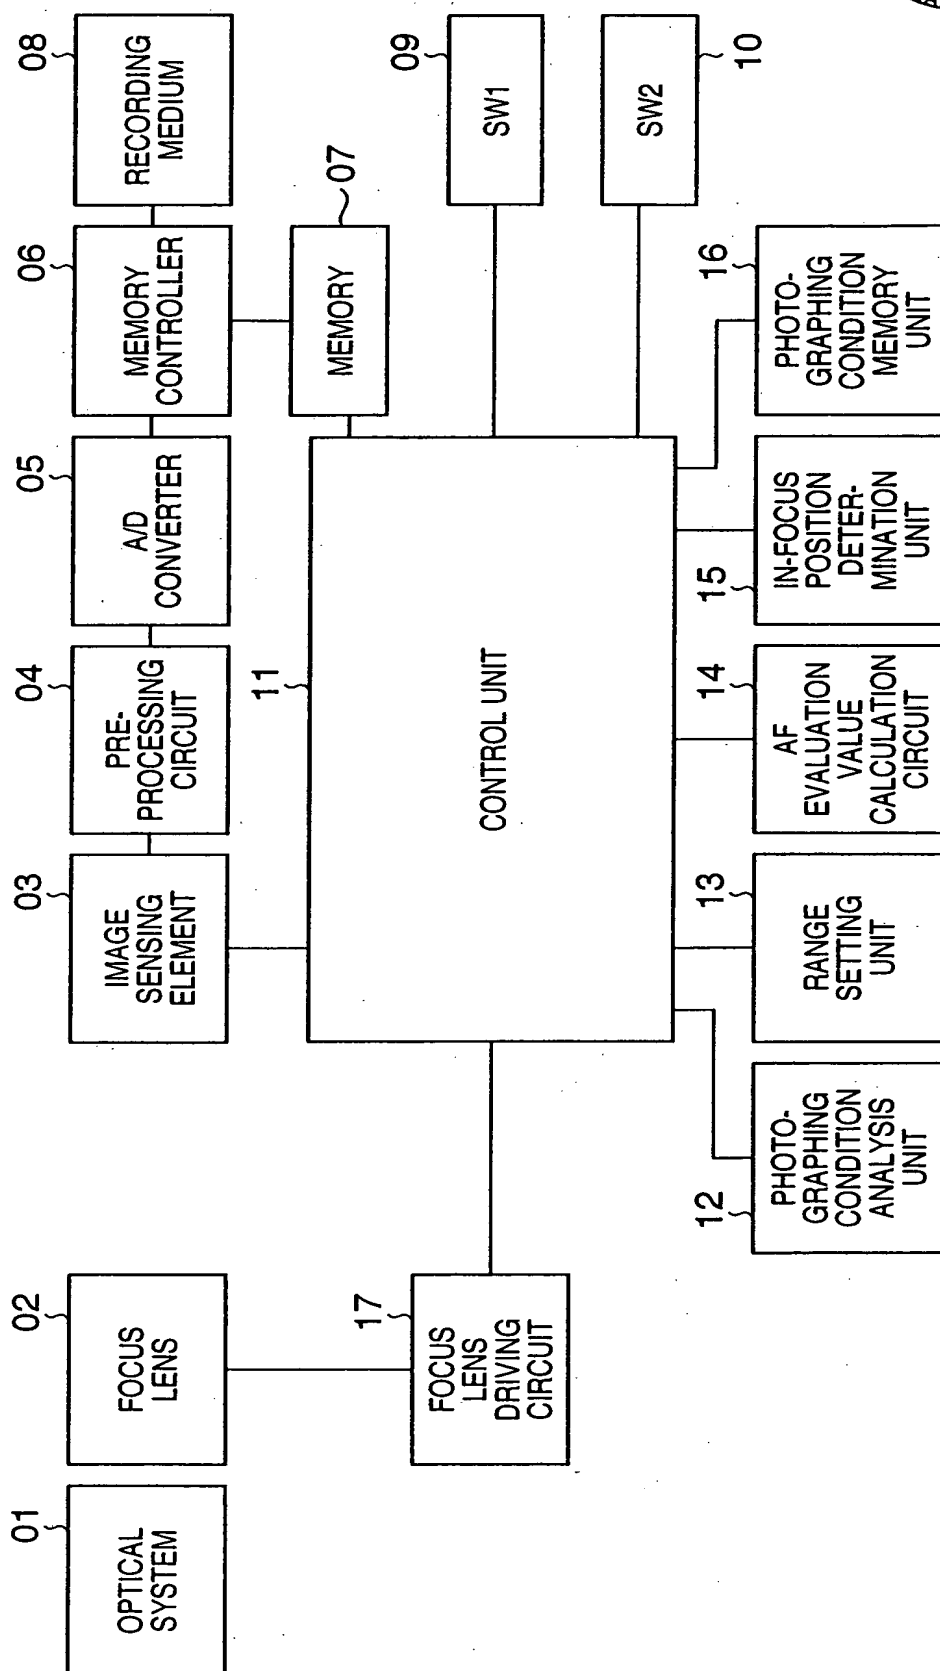BLOCK DIAGRAM SHOWING ARRANGEMENT ACCORDING TO FIRST EMBODIMENT
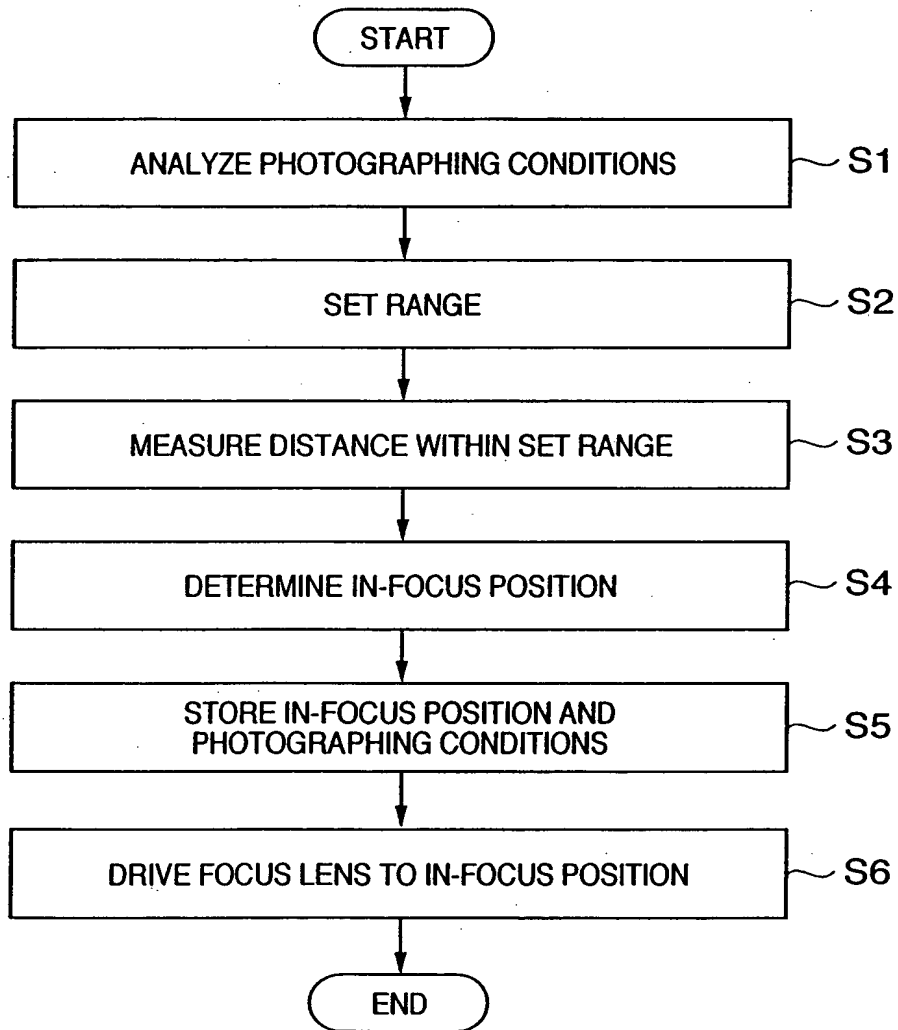
FIG. 2

FLOW CHART SHOWING
PROCESSING IN AF OPERATION

START

ANALYZE PHOTOGRAPHING CONDITIONS — S1

SET RANGE — S2

MEASURE DISTANCE WITHIN SET RANGE — S3

DETERMINE IN-FOCUS POSITION — S4

STORE IN-FOCUS POSITION AND
PHOTOGRAPHING CONDITIONS — S5

DRIVE FOCUS LENS TO IN-FOCUS POSITION — S6

END

FIG. 3

TABLE SHOWING MEMORY EXAMPLE OF MEMORY UNIT 16

	PREVIOUS PHOTOGRAPHING INFORMATION	CURRENT PHOTOGRAPHING INFORMATION
ZOOM POSITION	0 (Wide)	0 (Wide)
PHOTOGRAPHING TIME	15:00:00	15:00:20
MACRO SETTING	NON-MACRO	NON-MACRO
AF FRAME SETTING	FIRST FRAME	THIRD FRAME
BRIGHTNESS (Bv)	5	6
AF EVALUATION VALUE	1000	1020

F I G. 4

VIEW SHOWING EXAMPLE OF DIVISION OF SCANNING RANGE
OF FOCUS LENS ACCORDING TO SECOND EMBODIMENT

| ZONE 3 | ZONE 2 | ZONE 1 |

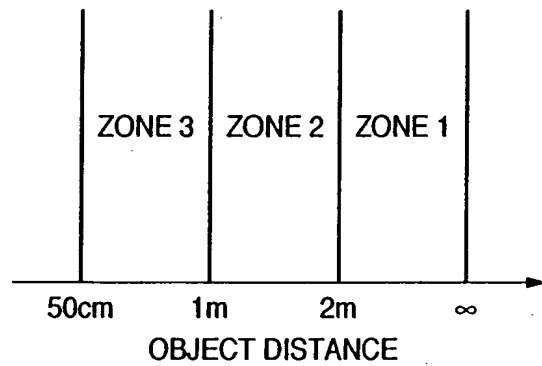50cm   1m   2m   ∞

OBJECT DISTANCE

FIG. 5

FLOW CHART SHOWING PROCESSING IN AF
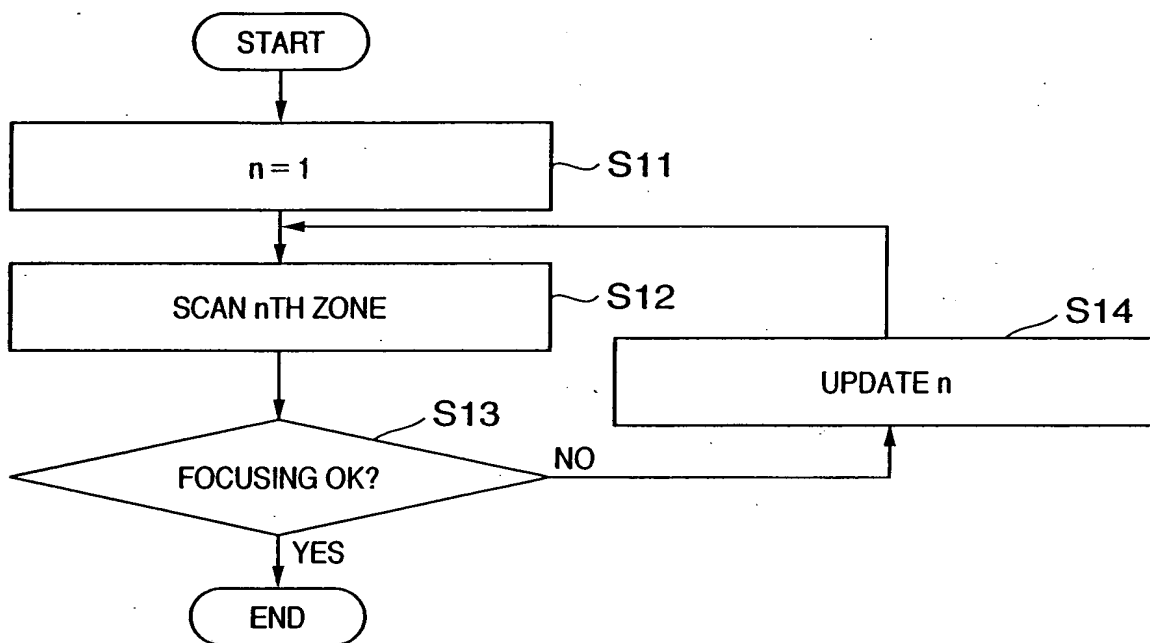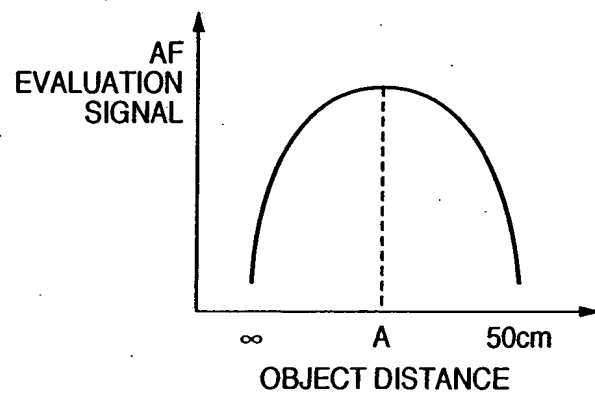OPERATION ACCORDING TO SECOND EMBODIMENT

FIG. 6

GRAPH SHOWING EXAMPLE OF RELATION BETWEEN OBJECT DISTANCE
CORRESPONDING TO IN-FOCUS POSITION AND AF EVALUATION SIGNAL

[Type of the Document] Abstract

[Abstract]

[Problem]   An object of this invention is to provide an autofocus apparatus and method, and an image sensing apparatus capable of shortening the AF time without decreasing the AF precision even when the total number of acquired AF evaluation signals is large.

[Solving means] To achieve this object, whether previous and current photographing conditions satisfy a predetermined requirement in photographing is determined (S1). When the previous and current photographing conditions are determined to satisfy the predetermined requirement, a focusing state only near an in-focus position in previous photographing is detected. When the previous and current photographing conditions are determined not to satisfy the predetermined requirement, a focusing state in the object region is detected(S2, S3). An in-focus position is determined by detecting the focusing state(S4), and the in-focus position and photographing conditions are stored for the next photographing(S5). A focus lens is moved to the in-focus position to photograph(S6).

[Selected Drawing] Fig. 2